

PRODUCT OVERVIEW

With a range of adjustable spray, temperature and dryer options, as well as intelligent care features, the AKW Bidet offers a cost-effective, easy-to-use and maintain solution, for those with a range of toileting needs.

WATER FEED OPTIONS

The AKW Bidet is mains water fed, with side and bottom-entry models available depending on your installation needs:

- + **Side-Entry Bidet** can be installed on most UK toilet pans and features an external side-entry water feed, allowing the bidet to be easily removed and/or reinstalled on another pan if required
- + **Bottom-Entry Bidet** is designed for use with select AKW Navlin and Navlin Doc M toilet pans, with the bottom-entry water feed concealed within the pan



SEAT OPTIONS

The AKW Bidet is available with a choice of two seats which can be easily removed, and used with/without the detachable lid:

- + **Ergonomic bidet seat** moulds to the natural contours of the body for optimum comfort and is designed for compatibility with most UK toilet pans, with a wide seat and standard-sized aperture
- + **Consilio bidet seat** benefits from a contemporary aesthetic designed to offer a clean, flush finish when paired with AKW Livenza Plus, Navlin and Navlin Doc M sanitaryware, and features a larger aperture



WARRANTY & APPROVALS

- + Compliant with BS EN 60335-1
- + 2-year warranty (Up to 5 years with our extended warranty options)



FEATURES & BENEFITS

- + **Adjustable spray control** offers thorough cleaning where and how it is needed:
 - 5 rear wash positions
 - 5 feminine wash positions
 - 5 spray intensity settings (approx. 0.6-1L per minute)
 - 1-2 minute wash cycles
 - 4 spray modes: Steady, Pulsating, Oscillating, Pulsating & Oscillating
- + **Instantaneous 1750W water heater** offers a steady flow with no reheating period in between washes, and a choice of temperature settings:
 - 2-minute constant wash cycle
 - 1-minute gradual cooling wash cycle
 - 6-stage temperature control (approx. 31-39°C)
- + **Powerful 350W dryer** with settings that can be tailored to specific needs:
 - 3-minute standard drying cycle
 - 6 temperature settings (approx. 40-52°C)
 - 5 adjustable speed settings
- + **Remote control** provides users with full function control via a handheld, ergonomic remote, which is easy to use and supports carers with maximising user dignity
- + **Self-cleaning function** ensures the spray arm nozzle and surrounding area are hygienic:
 - Pre and post wash nozzle cleaning
 - Automatic water purge if not used for 72 hours
- + **Night light** helps those with visual impairment or dementia locate the toilet in the dark or dimly lit conditions, helping to alleviate the risk of confusion
- + **Quiet and efficient operation** promotes user dignity while providing a reliable experience:
 - Low noise heater, water pump and dryer motor
 - 4 spray modes: Steady, Pulsating, Oscillating, Pulsating & Oscillating
- + **Integral seat sensor** prevents accidental usage by ensuring activation only occurs when the seat is in use
- + **Lid and seat lift assist** with front moulded grips on the lid and contrasting side tabs for easy lifting, which are more hygienic and supports those with limited dexterity



FEATURES & BENEFITS (CONTINUED)

- + **Quick-release seat and lid** allows you to adapt the bidet for various care needs, and makes cleaning easier
- + **Soft-close seat and lid** is slower, quieter, and therefore safer for users, especially children
- + **Seat lugs** provide discreet stability when side transferring from a chair or commode
- + **Strong load limit** of 23.5st (150kg) ensures the bidet is suitable for a wide variety of users
- + **Two seat options with UK-sized apertures** allowing for compatibility with most common pans:
 - Ergonomic seat is shaped for maximum comfort with a wider seat
 - Consilio seat features a larger aperture ideal for care environments
- + **Quick and easy** for your plumber and/or electrician to **install** with no specialist tools or prior training required
- + **Side or bottom-entry water supply** offers flexibility within a range of bathroom installations
- + **Easy to clean, user-friendly design**, which should require very little maintenance throughout the bidet's lifetime
- + **Low pressure mode** ensures the bidet continues working efficiently during periods of low pressure:
 - In standard mode 0.5 (dynamic) to 8 (static) bar of pressure is required to achieve a flow rate of 0.6 - 1L per minute; this water is instantaneously heated with no restart time required
 - Low pressure mode requires just 0.2 (dynamic) to 8 (static) bar to achieve a flow rate of 0.45 - 0.65L per minute, with a maximum of 25-second restart period
- + **Flexible warranty** for peace of mind:
 - 2-year warranty as standard
 - Up to 5-years cover available with our extended warranty options
- + **Sensor Operated Switch for AKW Bidet** allows people with limited dexterity to use select bidet functions by pressing the large button surface using a hand, fist, elbow, foot or arm, or by activating the hands-free sensor, available separately



Ergonomic Seat for AKW Bidet



Consilio Seat for AKW Bidet




TECHNICAL SPECIFICATION

	FUNCTION	DESCRIPTION
WASH	Rear wash	Yes
	Feminine wash	Yes
	Oscillating spray	Yes
	Pulsating spray	Yes
	Oscillating and pulsating spray	Yes
	Adjustable water temperature	6 levels (default 4th)
	Temperature modes	Constant temperature (default) and gradual cooling
	Adjustable flow rate	5 steps (default 3rd)
WARM AIR	Adjustable spray position	5 steps (default 3rd)
	Air drying	Yes
	Adjustable dryer temperature	6 levels (default 3rd)
HYGIENE	Adjustable dryer rate	5 steps (default 3rd)
	Nozzle auto cleaning	Yes
FEATURES	Nozzle manual cleaning	Yes
	Night light	Yes
	Soft-closing seat and lid	Yes
	Quick-release seat and lid	Yes
	Control buttons	Yes
	Remote control	Yes
SPECIFICATION	Water supply connector	G 1/2" / G 3/8"
	Water supply direction	Side or bottom entry
	Water supply pressure	Min 0.5 (dynamic) ~ Max 8 (static) bar (in standard mode)
	Water supply temperature	4 ~ 30°C
	Rated voltage	AC230V, 50HZ
	Power rating	1750W
	Length of power cord	Approx 1.5m
	Ambient temperature	4 ~ 40°C
	Protection degree	IPX4
WASH DEVICE	Maximum weight loading	23.5st / 150kg
	Flow rate (standard)	600 ~ 1000ml/min
	Flow rate (low)	450 ~ 650ml/min
	Water temperature	31 ~ 39°C
	Wash cycle time (standard)	2 Minutes at constant temperature mode or 1 minute at gradual cooling mode.
	Wash cycle time (low)	1 Minute at constant temperature mode and gradual cooling mode.
	Heating mode	Element
DRY DEVICE	Safety device	Thermal cut out fuses / liquid level switch / thermostat
	Back flow prevention	Air gap
	Minimum air volume	0.2m³ / min
	Maximum dryer power	350W
REMOTE CONTROL	Warm air temperature	40 ~ 52°C
	Dry cycle time	3 minutes
	Safety device	Thermal cut out fuses / thermostat
	Frequency	~2460MHz
	Maximum RF output power	0dBm
	Type of batteries	2x 1.5V LR03 AAA (batteries not included)

DIMENSIONS (mm)




ERGONOMIC SEAT FOR AKW BIDET

Designed for use with most common UK toilet pans

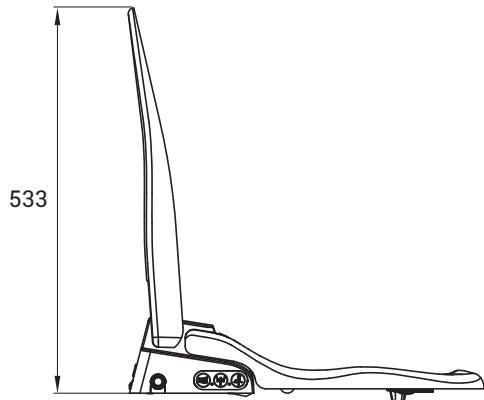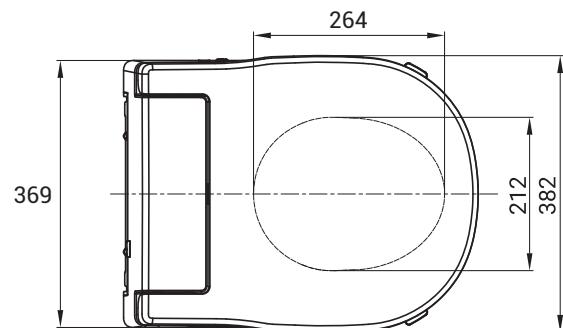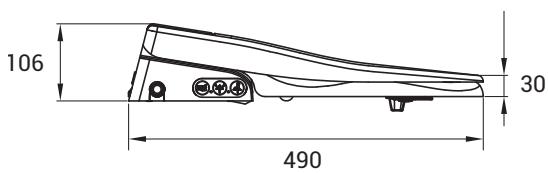


CONSILIO SEAT FOR AKW BIDET

Designed for use with AKW Livenza Plus, Navlin and Navlin Doc M toilet pans

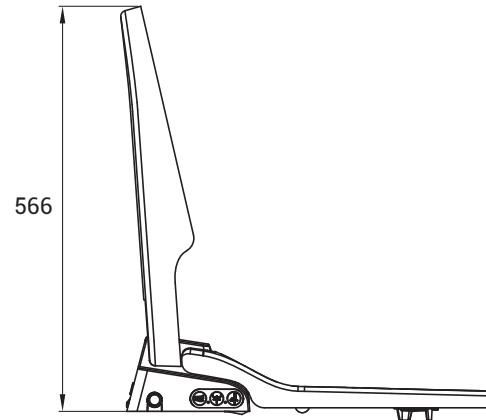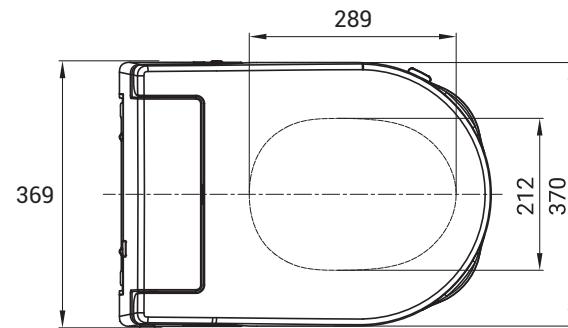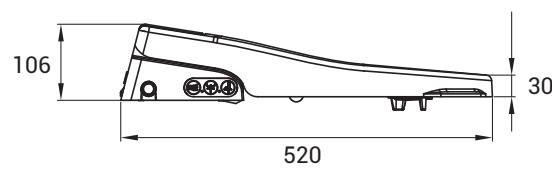


DIMENSIONS (mm)

ERGONOMIC SEAT

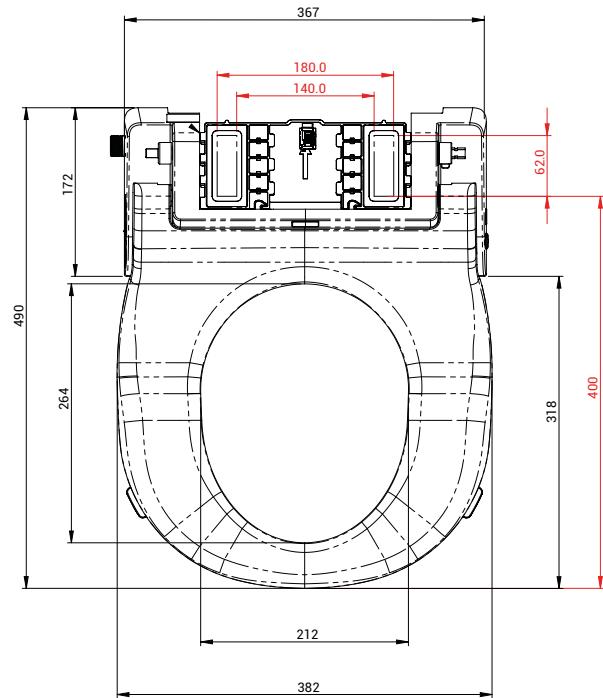

Dimensions highlighted in red are the
adjustable range for fixing the bidet to pan

CONSILIO SEAT

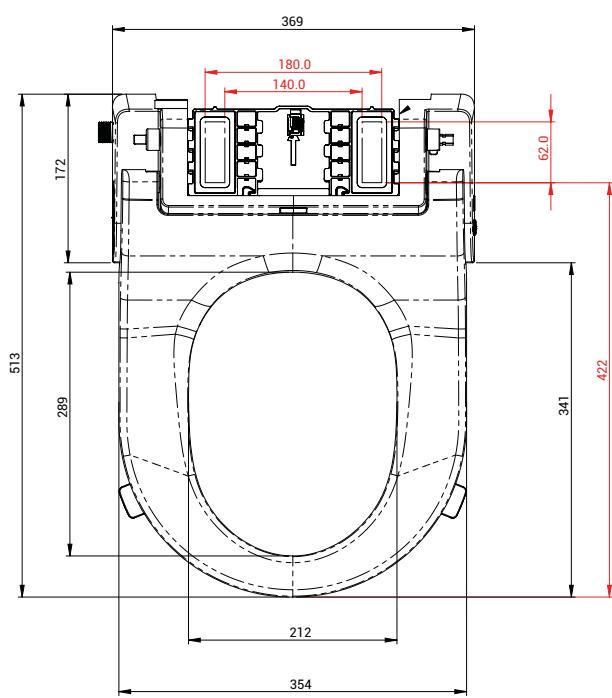

Dimensions highlighted in red are the
adjustable range for fixing the bidet to pan

Max/Min Fixing Point Tolerances Width	+/- 40mm (180 - 140mm)
Consilio Seat Max/Min Fixing Point Tolerances Length	+/- 62mm (484 - 422mm)
Ergonomic Seat Max/Min Fixing Point Tolerances Length	+/- 62mm (462 - 400mm)
Width Back Part Toilet Required	369mm
Length Back Part Toilet Required	172mm
Consilio Seat Width	354mm
Ergonomic Seat Width	382mm

PRODUCT CODES**SIDE-ENTRY BIDETS**

Side-Entry AKW Bidet with Consilio Seat & Lid	30501
Side-Entry AKW Bidet with Ergonomic Seat & Lid	30502

BOTTOM-ENTRY BIDET & SANITARYWARE PACKS

AKW Close-Coupled Bidet	28410
AKW Back-to-Wall Bidet	28412
AKW Wall-Hung Bidet	28413
AKW Rise & Fall Bidet	28414

OPTIONAL EXTRAS

Sensor Operated Switch for AKW Bidet	30505
AKW Bidet 1-Year Extended Warranty	30501-1
AKW Bidet 2-Year Extended Warranty	30501-2
AKW Bidet 3-Year Extended Warranty	30501-3

SPARES

AKW Bidet Remote Control	18-009-028
Ergonomic Toilet Seat for AKW Bidet	18-009-007
Consilio Toilet Seat for AKW Bidet	18-009-008
Bidet Splash Guard	21-020-034